



Paper-to-board
folder



Paper-to-film
folded boxes



Paper-to-film
bags



Paper-to-film
envelopes



Film-to-wood



Film-to-wood
(HPM lamination)



Wood-to-wood
D2 to D4



Flooring
installation



Wood manufactured
building
(manufactured
housing)



Textile
lamination



Tapes & labels



Car interiors

ADHESIVES | POLYMER BINDERS | EUROPE

PRODUCT OVERVIEW VINNAPAS® DISPERSIONS

YOUR QUALITY CHOICE – MADE EASY

Our VINNAPAS® dispersions are specially designed to address the continuously changing needs of the modern adhesives industry, offering up-to-date solutions for the latest end-user requirements and market trends.

VINNAPAS® dispersions set the industry benchmark in product quality, performance and reliability. With our product portfolio you benefit from:

- Consistently high quality
- 80 years' experience in vinyl acetate based dispersion technology
- Properties such as adhesion, heat resistance, bonding to a wide range of different substrates, fast setting speed, high wet tack, reliable machinability, and broad formulation possibilities

Technical Support



WACKER is one of the most research-intensive chemical corporations worldwide. Our VINNAPAS® grades for adhesives applications are produced in five manufacturing plants across Europe, the Americas, China and the Asia-Pacific region. To support adhesives manufacturers, we also operate dedicated state-of-the-art adhesives laboratories and technical centers around the globe, where we carry out extensive tests to develop formulations for new products or optimize those of existing products.

VINNAPAS[®] VAE – THE HIGH-PERFORMANCE SOLUTION

Success in the adhesives market often depends on choosing the right binder. VINNAPAS[®] vinyl acetate-ethylene (VAE) technology offers outstanding benefits in terms of performance, safety and versatility.

VINNAPAS[®] VAE dispersions are water-based co- and terpolymers mainly based on vinyl acetate and ethylene as comonomers.

Ethylene contributes permanent flexibility to the VAE polymer. No external plasticizer is thus necessary in VAEs.


Diverse Applications

VINNAPAS[®] VAE dispersions can be formulated into adhesives for various applications:

- Paper Packaging (e.g. food packaging, envelope manufacturing, film lamination onto paper)
- Wood (e.g. film lamination onto wood, 3D membrane pressing, EPI systems)
- Flooring (e.g. textile flooring, flexible coverings)
- Automotive (e.g. door paneling)
- Tapes & Labels (e.g. paper labels)

Two Monomers Creating Best-in-Class Performance


Vinyl acetate



Rigid

+


Ethylene



Flexible

→

Vinyl acetate-ethylene (VAE)

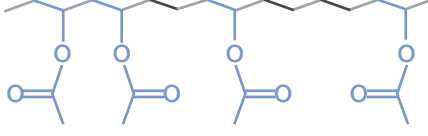

Polymer Properties Provided by Ethylene:

- Softness (T_g approx. -125 °C)
- Non-polar, hydrophobic
- Permanent flexibility
- High saponification resistance
- Form ideal copolymers with vinyl acetate

Vinyl Acetate:

- Hardness (T_g approx. 32 °C)
- Polar, hydrophilic
- Rigid

VAE Copolymer and Terpolymer Dispersion Properties:

VINNAPAS[®] VAE dispersions can be formulated into adhesives that provide outstanding benefits:

- Excellent adhesion to a wide variety of substrates
- High heat resistance
- Very fast setting
- Excellent machinability and re-emulsification properties
- Very good cost / performance ratio
- T_g range from approx. -35 °C to approx. 30 °C, depending on ethylene content

PRODUCT OVERVIEW

VINNAPAS® Product	Technical Data ¹									Product Benefit	Performance Attributes																VINNAPAS® Product						
	Base Polymer ²	Solids Content (DIN EN ISO 3251) (± 1%)	Viscosity BF 20 at 23 °C at 20 rpm [mPa s] (ISO 2555)	pH (ISO 976)	Glass Transition Temperature Midpoint [°C] (approx.)	Minimum Film-Forming Temperature (MFFT) (DIN ISO 2115) [°C] (approx.)	Film Surface	Stabilizing System ^{3,4}	Paper Packaging								Wood to Wood				Film to Wood				Flooring Installation			Tapes & Labels			Car Interiors		
									Adhesion (for e.g. film to paper)		Cohesion / Heat Resistance	Setting Behavior	Roller / Wheel Application	Nozzle Application	Cleanability	Water Resistance	D3 (EN 204) ≥ 2 N/mm ²	D4 (EN 204) ≥ 4 N/mm ²	Watt 91 (EN 14257) [N/mm ²] (approx.)	Low Wood Discoloration	Setting Behavior	Adhesion	Water Resistance	Heat Resistance	Setting Behavior	Workability		Overall Adhesion	Heat Resistance	Setting Behavior	Tack	Shear Resistance	Adhesion
VINNAPAS® Products VAE Technology (Copolymers and Terpolymers)																																	
VINNAPAS® EAF 67	VAc-E-A	60 ± 2	7,000 ± 2,500	4 – 5	-35	0	Tacky	ST	Low T _g grade for flooring adhesives or Tapes & Labels.	●●	●	●	●	●	●	●	●	●●●	●	●	●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	VINNAPAS® EAF 67		
VINNAPAS® EAF 68	VAc-E-A	58 – 61	7,000 ± 2,500	4 – 5	-35	0	Tacky	ST	Low T _g grade for flooring adhesives with excellent dimensional stability.	●●	●	●	●	●	●	●	●	●	●	●	●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	VINNAPAS® EAF 68		
VINNAPAS® EF 8860	VAc-E	57	1,500 ± 1,000	4 – 5	-10	0	Slightly tacky	ST	Medium-soft binder for flooring adhesives with good plasticizer resistance and high cohesion.	●●	●	●	●	●	●	●	●	●	●	●	●●	●●	●●●	●	●	●	●	●	●	●	VINNAPAS® EF 8860		
VINNAPAS® EP 1	VAc-E	50	9,000 ± 3,000	4 – 5	1	0	Slightly tacky	PVOH / ST	Good compatibility with PUD. Water resistant glue line.	●●	●●	●●	●●●	●	●●●	●●●	●●	●●	●●	●●	●	●●	●●	●	●	●	●	●	●	●	VINNAPAS® EP 1		
VINNAPAS® EP 11	VAc-E	50	5,000 ± 1,000	4 – 5	3	0	Slightly tacky	PVOH	Specially designed for cigarette / tipping applications.	●●	●●	●●	●●●	●	●●●	●●	●●	●●	●●	●●	●	●	●	●	●	●	●	●	●	●	VINNAPAS® EP 11		
VINNAPAS® EP 14	VAc-E	55	5,500 ± 1,500	4 – 5	3	0	Slightly tacky	PVOH	Universal binder for paper packaging applications / film-to-wood lamination.	●●	●●	●●	●●●	●	●●●	●●	●●	●●	●●	●●	●	●	●	●	●	●	●	●	●	●	VINNAPAS® EP 14		
VINNAPAS® EP 17	VAc-E	60	3,800 ± 1,000	4 – 5	3	0	Slightly tacky	PVOH / ST	Good compatibility with PUD, also recommended for automotive applications.	●●	●●	●●	●●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	VINNAPAS® EP 17			
VINNAPAS® EP 24	VAc-E	57	12,000 ± 3,000	4 – 5	3	0	Slightly tacky	PVOH	Universal binder for paper packaging applications / film-to-wood lamination. High viscosity.	●●	●●	●●	●●●	●●	●●	●●	●●	●●	●●	●●	●	●	●	●	●	●	●	●	●	VINNAPAS® EP 24			
VINNAPAS® EP 400	VAc-E	55	2,400 ± 400	4 – 5	5	0	Slightly tacky	PVOH	Universal binder for paper packaging applications / film-to-wood lamination.	●●	●●	●●	●●●	●●	●●	●●	●●	●●	●●	●	●	●	●	●	●	●	●	●	●	VINNAPAS® EP 400			
VINNAPAS® EP 401	VAc-E	55	2,500 ± 800	4 – 5	-7	0	Slightly tacky	PVOH	Universal binder for paper packaging applications / film-to-wood lamination. Higher adhesion level compared to VINNAPAS® EP 400.	●●	●●	●●	●●●	●●	●●	●●	●●	●●	●●	●	●	●	●	●	●	●	●	●	●	VINNAPAS® EP 401			
VINNAPAS® EP 441	VAc-E	55 ± 2	4,000 ± 1,000	4 – 5	5	0	Slightly tacky	PVOH	Universal binder for paper packaging applications / film-to-wood lamination. Especially suitable for nozzle (HHS) applications.	●●	●●	●●	●●●	●●	●●	●●	●●	●●	●●	●	●	●	●	●	●	●	●	●	●	VINNAPAS® EP 441			
VINNAPAS® EP 8010	VAc-E	58 – 61	6,000 ± 2,000	4 – 5	-10	0	Slightly tacky	PVOH / ST	Excellent adhesion to various difficult-to-bond surfaces, also recommended for automotive applications.	●●	●●	●●	●●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	VINNAPAS® EP 8010			
VINNAPAS® EPN 865	VAc-E	62 ± 2	2,500 ± 1,500	4 – 5	20	6	Slightly tacky	PVOH	Higher T _g , functional monomers for crosslinking under heat.	●	●●	●●	●●●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	VINNAPAS® EPN 865			
VINNAPAS® Products PVAc Technology																																	
VINNAPAS® DP 55	VAc	55 ± 2	3,000 ± 1,500	4 – 5	33	14	Tack-free	PVOH	Low-viscosity PVOH-stabilized homopolymer.	●	●●	●●	●●	●	●●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	VINNAPAS® DP 55			
VINNAPAS® DP 500	VAc	50 ± 2	35,000 ± 5,000	4.5 – 5.5	33	14	Tack-free	PVOH	Very low sedimentation, excellent plasticizer response.	●	●●	●●	●●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	VINNAPAS® DP 500			
VINNAPAS® DP 600	VAc	60 ± 2	35,000 ± 6,000	4 – 5.5	33	14	Tack-free	PVOH	Very low sedimentation, excellent plasticizer response.	●	●●	●●	●●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	VINNAPAS® DP 600			
VINNAPAS® DPN 15	VAc	52	15,000 ± 3,000	2.5 – 3.5	28	5	Tack-free	PVOH	D3 1C wood adhesive.	●	●●	●●	●●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	VINNAPAS® DPN 15			
VINNAPAS® DPN 16	VAc	52 ± 2	12,000 ± 2,000	2.5 – 3.5	28	5	Tack-free	PVOH	D3 1C wood adhesive, reduced discoloration.	●	●●	●●	●●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	VINNAPAS® DPN 16			
VINNAPAS® DPN 17	VAc	48	11,000 ± 2,000	2.5 – 3.5	28	4	Tack-free	PVOH	D3 1C wood adhesive, longer open time.	●	●●	●●	●●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	VINNAPAS® DPN 17			
VINNAPAS® DPN 47	VAc	50 ± 2	18,000 ± 4,000	4.5 – 5.5	19	3	Tack-free	PVOH	D4 2C wood adhesive.	●	●●	●●	●●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	VINNAPAS® DPN 47			
VINNAPAS® DPX 271	VAc	46 ± 2	10,000 ± 4,000	5 – 6	30	5	Tack-free	PVOH	D3 1C wood adhesive, low formaldehyde, discoloration-free.	●	●●	●●	●●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	VINNAPAS® DPX 271			
VINNAPAS® H 65	VAc	65	30,000 ± 10,000	4 – 5	40	14	Tack-free	PVOH	PVOH-stabilized homopolymer with outstanding setting speed.	●	●●	●●	●●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	VINNAPAS® H 65			
VINNAPAS® M 50/300	VAc	50	1,000 ± 300	4 – 5	35	14	Tack-free	PVOH	Low-viscosity PVOH-stabilized homopolymer.	●	●●	●●	●●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	VINNAPAS® M 50/300			

¹ These figures are intended as a guide only and should not be used in preparing specifications.
² VAc = Vinyl acetate
 A = Acrylic ester
 E = Ethylene
³ PVOH = Polyvinyl alcohol
 ST = Surfactant
⁴ All products produced without the use of APEO surfactants
 Legend for performance attributes
 ●●● Excellent ●● High ● Medium



Paper-to-board folder



Paper-to-film folded boxes



Paper-to-film bags



Paper-to-film envelopes



Film-to-wood



Film-to-wood (HPM lamination)



Wood-to-wood D2 to D4



Flooring installation



Wood-manufactured building (manufactured housing)



Textile lamination



Tapes & labels



Car interiors

WACKER

Wacker Chemie AG
Hanns-Seidel-Platz 4
81737 München, Germany
Tel. +49 89 6279-1741
info@wacker.com

www.wacker.com

www.wacker.com/socialmedia



7252e/03.19 replaces 7252e/05.17

The data presented in this medium are in accordance with the present state of our knowledge but do not absolve the user from carefully checking all supplies immediately on receipt. We reserve the right to alter product constants within the scope of technical progress or new developments. The recommendations made in this medium should be checked by preliminary trials because of conditions during processing over which we have no control, especially where other companies' raw materials are also being used. The information provided by us does not absolve the user from the obligation of investigating the possibility of infringement of third parties' rights and, if necessary, clarifying the position. Recommendations for use do not constitute a warranty, either express or implied, of the fitness or suitability of the product for a particular purpose.