

STAIN PROTECTION | CEMENTITIOUS FLOORING

SILRES® BS 6920

An Innovative Silane-Terminated Binder for the Coating of Cementitious Floorings

Today, many modern buildings showcase concrete or flowing-screed floors without any top-layers. These floorings have a special esthetic appeal through their smooth and seamless surface, yet they stain very easily. With SILRES® BS 6920, WACKER offers a new binder for both ready-to-use impregnating agents and thin coatings for cement-bound floors. It provides excellent stain protection superior to conventional coatings and has a color-intensifying effect.

An Innovative Binder Based on a Patented Technology

SILRES® BS 6920 is an alpha-silane-terminated polyether based on WACKER's proprietary alpha-silane technology. SILRES® BS 6920 cures on contact with moisture and its chemical structure has been optimized to achieve low viscosity. As a result, the binder penetrates deep into the pores of a cement-bound floor, filling the pores completely and forming a thin, shiny film on the surface. After the binder has cured, everyday substances containing water or oil are unable to enter the pores. The new binder therefore offers highly effective stain protection. Even substances that are left on the surface for some time can be removed without any lasting stains.

Product Description of SILRES® BS 6920

Appearance	Transparent liquid
Solvents	Solvent free
VOC-Content	Low VOC (~0,5%, 6g/l) (Directive 2010/75 EU)
Flash point	>100 °C
Viscosity	75 mPas
Storage behavior	Long-term stable and non-sensitive to moisture .

Application Range

SILRES® BS 6920 is ideal for cement-bound floors in industrial, commercial and private residential buildings. Examples are:

- Parking garages
- Car repair shops
- Train stations and logistics centers
- Showrooms
- Restaurants
- Event and convention centers
- Museums

Benefits of Coatings Based on SILRES® BS 6920

- 1K Formulation
- Deep penetration
- Solvent free
- Transparent
- Excellent stain resistant
- Scratch resistant
- Color enhancing
- Polishable
- Easy to apply
- Incombustible

Easy to Mix and to Formulate

Due to its low viscosity, SILRES® BS 6920 can be easily mixed with standard equipment (dissolver, mixer). The low viscosity makes solvent-free processing possible, although a solvent may be added if required. Formulators can use pigments, reinforcing fillers and matting agents to vary the properties of their end products. To accelerate curing, SILRES® BS 6920 is usually formulated with an aminofunctional silane (GENIOSIL® GF 9 for example) that also ensures good adhesion to cement-bound substrates. In general, SILRES® BS 6920 offers formulators considerable flexibility.

Easy to Apply, Fast to Walk On

Impregnating agents based on SILRES® BS 6920 are usually applied twice. The first coat strengthens the floor. A second produces a homogeneous surface that increases scratch and scrub resistance and makes the floor polishable. It is possible to walk on or drive over the floors about twenty-four hours after treatment.




Coatings based on SILRES® BS 6920 are easily applied by wiping or rolling.

Comparing SILRES® BS 6920 with Other Impregnation Systems

There are different systems available to increase the stain resistance of mineral surfaces. Compared with these systems, SILRES® BS 6920 shows better stain resistance.

Comparison of Typical Impregnation Systems		
Silicates	Silane Based	SILRES® BS 6920
Well known	Well known	New
Water based	Solvent based	Free of solvents
	Low flash point	High flash point
Alkaline	Neutral	Neutral
		Dilutable
Very limited stain resistance	Limited stain resistance	Excellent anti-staining properties

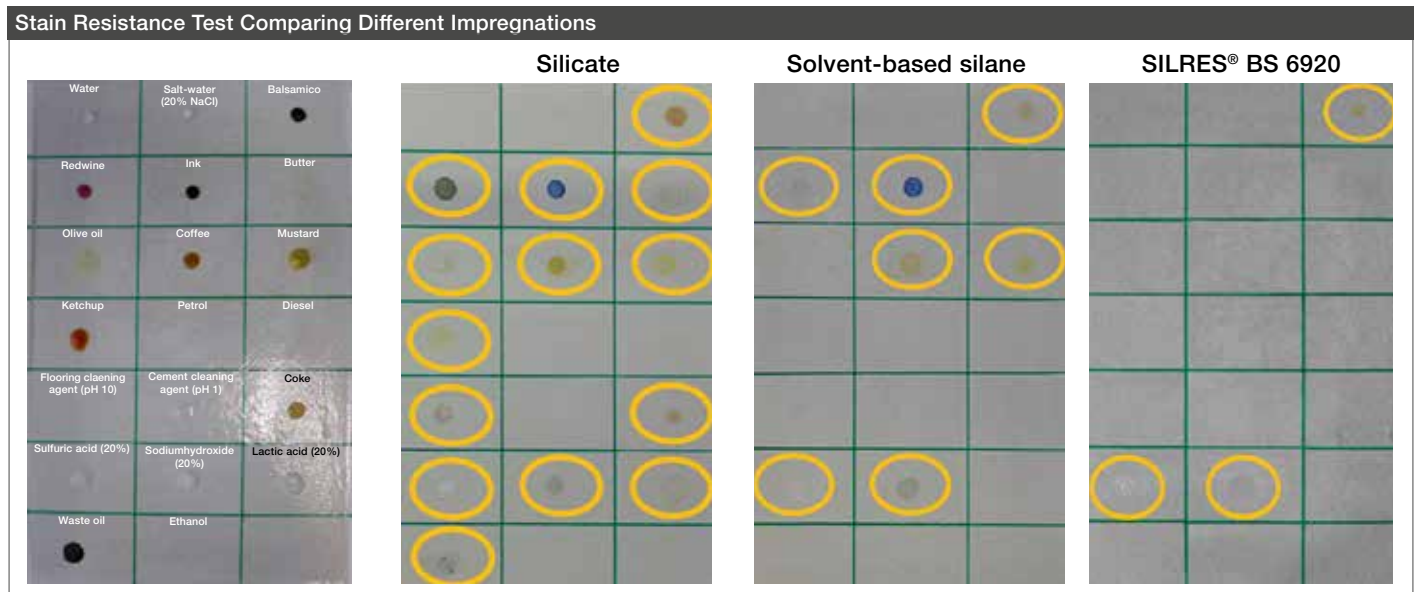

Test procedure:

- 1: Impregnation of three concrete slabs with silicate, solvent-based silane and a SILRES® BS 6920 formulation.
- 2: Conditioning/storage for 1 week.
- 3: Treatment with test ingredients/chemicals for 24 hours

Wacker Chemie AG, 81737 München, Germany, Tel. +49 89 6279-1741
 info@wacker.com, wacker.com/silres, www.wacker.com/socialmedia



The data presented in this medium are in accordance with the present state of our knowledge but do not absolve the user from carefully checking all supplies immediately on receipt. We reserve the right to alter product constants within the scope of technical progress or new developments. The recommendations made in this medium should be checked by preliminary trials because of conditions during processing over which we have no control, especially where other companies' raw materials are also being used. The information provided by us does not absolve the user from the obligation of investigating the possibility of infringement of third parties' rights and, if necessary, clarifying the position. Recommendations for use do not constitute a warranty, either express or implied, of the fitness or suitability of the product for a particular purpose.