

PRIMIS® SAF 9000

Innovative Oleo- and Hydrophobic Dispersions for Flooring Applications

With PRIMIS®, WACKER offers a range of specially designed polymer dispersions that stand out thanks to their performance and innovation potential. The latest development within this state-of-the-art portfolio is the PRIMIS® SAF 9000 series: a range of highly resistant, extremely fine-particulate polymer dispersions that combine both oleophobicity and hydrophobicity – thus opening up a spectrum of innovative applications.

Novel Surface Treatment for Mineral Floors

Products of the PRIMIS® SAF 9000 series are newly developed waterborne dispersions with high molecular weight and ultra-fine particle size that are oleophobic as well as hydrophobic. In dilute form they constitute a very effective dirt-repellent surface treatment for decorative mineral surfaces, such as self-leveling flooring compounds and concrete floors.


Product Data of PRIMIS® SAF 9000

Polymer composition	Styrene acrylic
Minimum film-forming temperature (MFFT)	13 °C
T _g	22 °C
Solid content	42 ± 1%
Particle size	<0.1 µm
Viscosity	50 – 500
pH	6.5–7.5

Long-Term Protection


Due to the extremely fine particle size with diameters of less than 0.1 micrometers, the dispersions are able to penetrate into the very fine micropores of mineral surfaces providing long-lasting protection against the most diverse stains. Red wine, coffee, ketchup or oil can be simply wiped off the treated surface without leaving any residue.

Surface Treatment with PRIMIS® SAF 9000

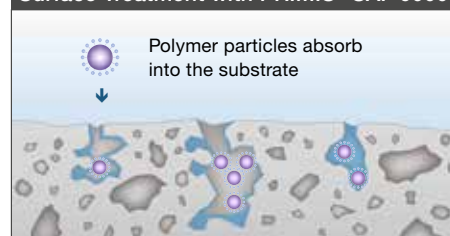

The PRIMIS® SAF 9000 dispersions contain extremely fine particles that distribute evenly into the micro- and submicropores of the treated surfaces preventing the dirt from penetrating the substrate.

The Stain Resistance Significantly Improves on SLCs Treated with PRIMIS® SAF 9000

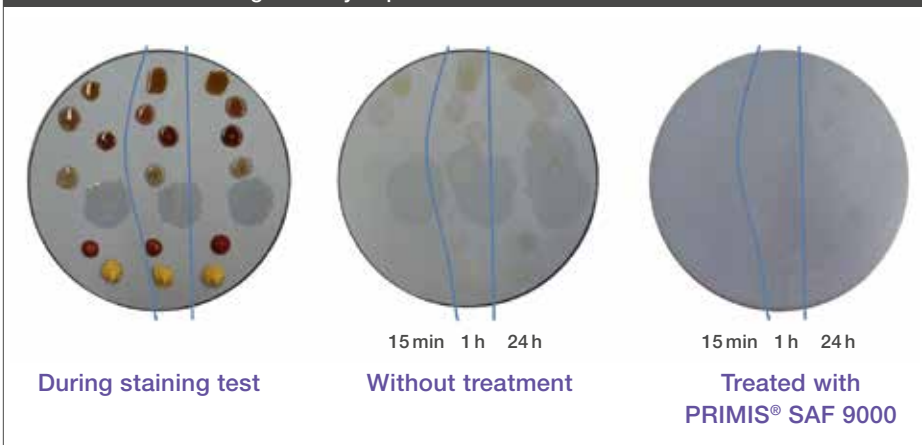



Improved Mechanical Properties



As PRIMIS® SAF 9000 dispersions are composed of a highly resistant polymer, the surface treatment greatly increases the mechanical properties of the flooring, such as abrasion resistance and durability.

Easy-to-Use and Rapid Drying

PRIMIS® SAF 9000 dispersions are applied in dilute form, for example with a mop brush. They are absorbed quickly and floors are accessible after only a short time.

Exempt from Labeling

PRIMIS® SAF 9000 is exempt from labeling requirements and according to the German Federal Institute for Risk Assessment (BfR) is even suitable for contact with food and drinking water (Bf Recommendation XIV). The new dispersions are thus an environmentally compatible option for a wide variety of interior and exterior applications.

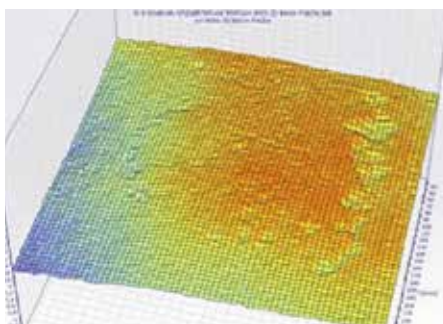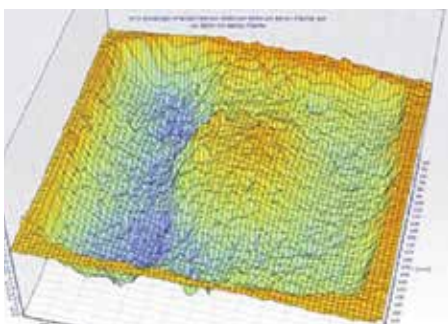


A surface scan after abrasion testing on a concrete plate clearly shows how treatment with PRIMIS® SAF 9000 prevents erosion. The sample on the left shows severe surface erosion. While the sample on the right, which was treated with PRIMIS® SAF 9000, shows enhanced abrasion resistance.

Benefits of PRIMIS® SAF 9000 at a Glance:

- Ease of application
- Fast drying time
- UV resistant
- Alkaline resistance
- Abrasion resistance
- Stain resistance
- For indoor and outdoor
- Natural look
- BfR XIV and FDA compliant

Application Areas of PRIMIS® SAF 9000 on Floors

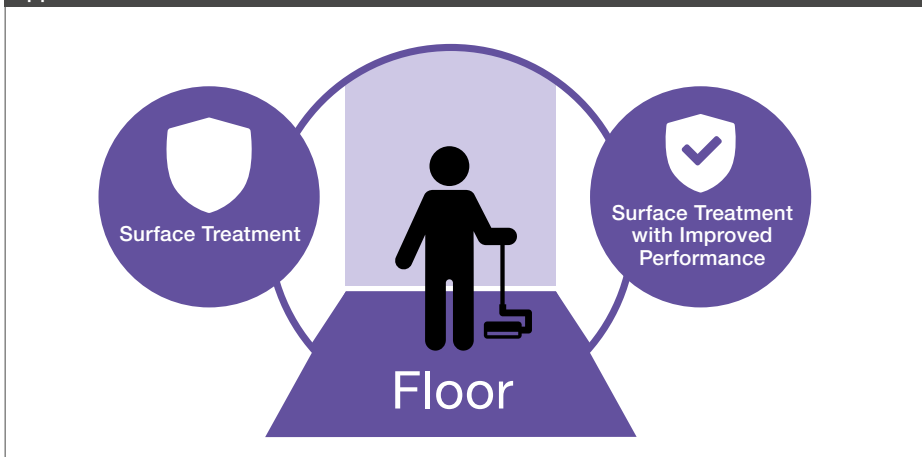

Wacker Chemie India Pvt. Ltd., Off. I.B. Patel Road, Goregaon (E), Mumbai - 400 063, India, Phone: +91 22 42365-500
 info.india@wacker.com, www.wacker.com/construction, www.wacker.com/primis, www.wacker.com/socialmedia



The data presented in this medium are in accordance with the present state of our knowledge but do not absolve the user from carefully checking all supplies immediately on receipt. We reserve the right to alter product constants within the scope of technical progress or new developments. The recommendations made in this medium should be checked by preliminary trials because of conditions during processing over which we have no control, especially where other companies' raw materials are also being used. The information provided by us does not absolve the user from the obligation of investigating the possibility of infringement of third parties' rights and, if necessary, clarifying the position. Recommendations for use do not constitute a warranty, either express or implied, of the fitness or suitability of the product for a particular purpose.